


CLAP ECO LEATHER 2015

Design Patricia Urquiola

4183 

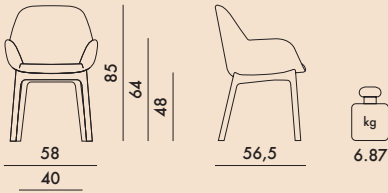

FRAME

Mass-dyed thermoplastic technopolymer



SEAT

PVC-coated fabric




Fire tested version

IT UNI 9175, EN1021 fire reaction test class 1 IM ministerial certification
MI1848D20D1IM00021

UK Standard BS 7176 Medium Hazard - S.I. 1324

US - California Standard TB 117



4183

1
1

6.73
3.97

0.161
0.120

54X49X61
51X51X46

EN 1022 2005	Compliant
EN 16139 2013	Compliant
EN 1728:2012	level reached
6.4	(maximum level) L2
6.5	(maximum level) L2
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.24	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2